

## mgr - Bug #39328

### mgr/dashboard: Adapt iSCSI discovery auth for read-only users


04/16/2019 04:00 PM - Ricardo Marques

<b>Status:</b>	Resolved	<b>Start date:</b>	04/16/2019
<b>Priority:</b>	Normal	<b>Due date:</b>	
<b>Assignee:</b>	Tiago Melo	<b>% Done:</b>	0%
<b>Category:</b>	dashboard/iscsi	<b>Estimated time:</b>	0.00 hour
<b>Target version:</b>	v15.0.0	<b>Reviewed:</b>	
<b>Source:</b>		<b>Affected Versions:</b>	
<b>Tags:</b>		<b>ceph-qa-suite:</b>	
<b>Backport:</b>	nautilus	<b>Pull request ID:</b>	27678
<b>Regression:</b>	No		
<b>Severity:</b>	3 - minor		


#### Description

The "Set discovery authentication" button should be renamed to "Discovery authentication" (for all users):

Block » [iSCSI](#) » Targets

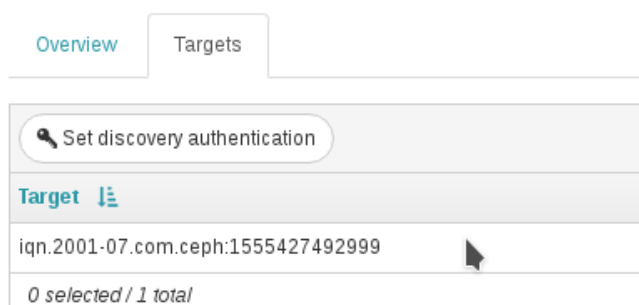

And the discovery authentication modal should be disabled (for 'read-only' users):

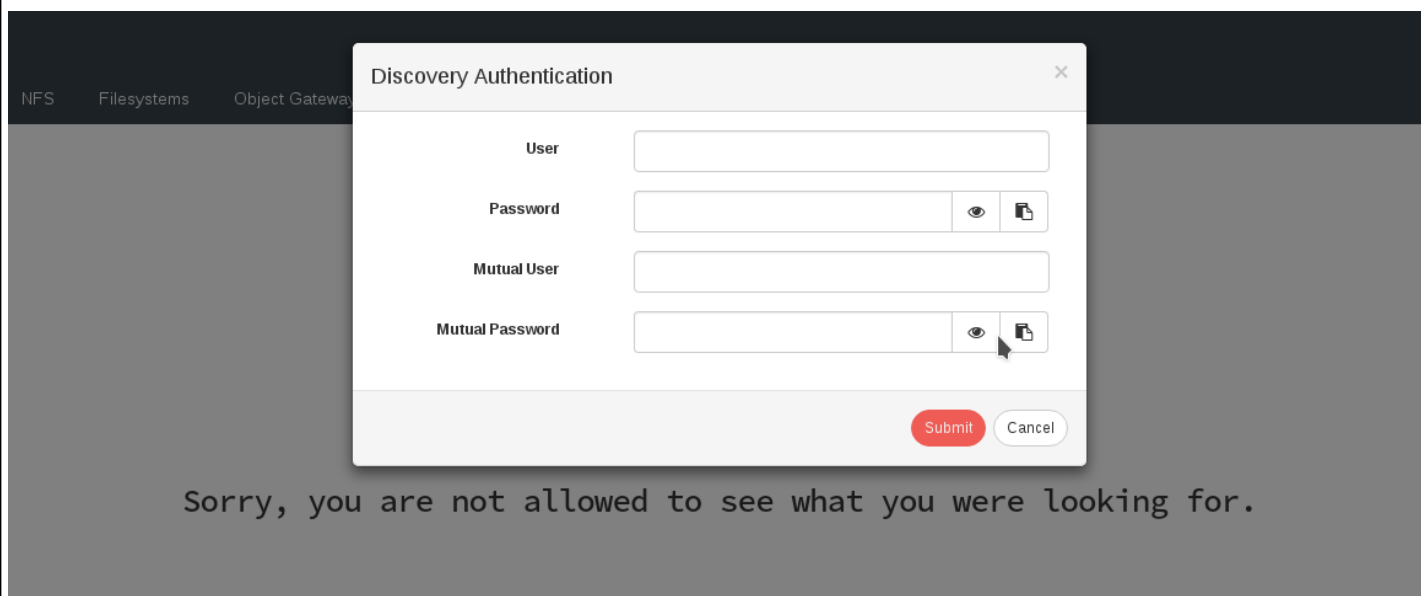

#### Related issues:

Copied to mgr - Backport #39453: nautilus: mgr/dashboard: Adapt iSCSI discove...

**Resolved**

## History

---

### #1 - 04/18/2019 12:31 PM - Tiago Melo

- Status changed from New to Need Review
- Backport set to nautilus
- Pull request ID set to 27678

### #2 - 04/24/2019 11:32 AM - Lenz Grimmer

- Status changed from Need Review to Pending Backport
- Target version set to v15.0.0

### #3 - 04/24/2019 03:56 PM - Ricardo Marques

- Copied to Backport #39453: nautilus: mgr/dashboard: Adapt iSCSI discovery auth for read-only users added

### #4 - 05/08/2019 11:23 AM - Lenz Grimmer

- Subject changed from mgr/dashboard: Addapt iSCSI discovery auth for read-only users to mgr/dashboard: Adapt iSCSI discovery auth for read-only users

### #5 - 05/08/2019 12:05 PM - Lenz Grimmer

- Status changed from Pending Backport to Resolved

## Files

---

Screenshot_20190416_165331.png	11.5 KB	04/16/2019	Ricardo Marques
Screenshot_20190416_165515.png	27.8 KB	04/16/2019	Ricardo Marques